

60A, 600V Ultrafast Dual Diode

Description

The AKFA60UP60DN is an ultrafast dual diode with low forward voltage drop. This device is designed for FWD in motor and power switching applications, It is specially suited for use in switching power supplies and industrial applications as welder, UPS and inverter.


Features

• Ultrafast Soft Recovery: T_{rr}=90ns (max)

• Typical Forward Voltage: V_F=1.2V @ I_F=30A

• Reverse Voltage: V_{RRM}=600V

•Avalanche Energy Rated



Applications

- Welder & UPS & Inverter
- Switching Power Supply
- FWD for Motor Application

Absolute Maximum Ratings per diode at T_c =25 $^{\circ}$ C unless otherwise noted

Symbol	Parameter		Ratings	Unit
V_{RRM}	Peak Repetitive Reverse Voltage		600	V
V_{RWM}	Working Peak Reverse Voltage		600	V
V _R	DC Blocking Voltage		600	V
I _{F(AV)}	Average Rectified Forward Current	per device at T _c =120℃	60	А
I _{FSM}	Non-repetitive Peak Surge Current		180	Α
T_J	Operating Junction Temperature Range		-65~+150	$^{\circ}$
T _{STG}	Storage Temperature Range		-65~+150	$^{\circ}$

Thermal Characteristics

Symbol	Parameter	Ratings	Unit	
R _{th (J-C)}	Thermal Resistance, Junction to case	1.3	°C/W	

www.aikoelectronics.com Page 1 of 3



Electrical Characteristics per diode $@T_c$ =25 $^{\circ}$ C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
V _F	Forward Voltage Drop	I _F =30A	-	1.2	1.5	V
		I _F =30A, T _C =125℃	-	-	1.4	V
I _R	Reverse Leakage Current	V _R =600V	-	-	100	uA
T _{rr}	Reverse Recovery Time	I _F =30A, di/dt=-200A/us	-	-	90	ns
E _{AS}	Avalanche Energy	L=30mH	20	-	-	mJ

Typical Performance Characteristics

Fig. 1. Typical Characteristics: V_F vs. I_F




Fig. 2. Typical Characteristics: V_R vs. I_R




Fig. 3. Typical Reverse Recovery Time vs. di/dt





Fig. 4. Typical Reverse Recovery Current vs. di/dt




www.aikoelectronics.com Page 2 of 3




Package Dimensions

TO-3PN

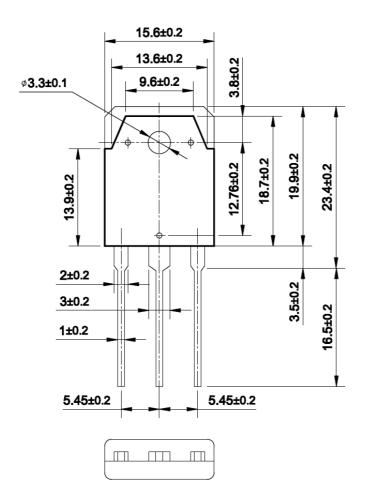

(Dimensions in Millimeters)

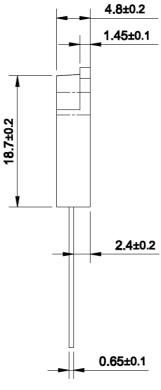

www.aikoelectronics.com Page 3 of 3