

800V 6A N-Channel Enhancement Mode Power MOSFET

Description


The AKQP6N80C is an N-Channel enhancement mode power MOSFET, it has low static on-resistance and high avalanche energy strength. This device provide excellent switching performance for switched mode power supplies, active power factor correction and electronic lamp ballasts.

Features

- Low on-Resistance: $R_{DS(on)}=1.3\Omega(\text{typ.})$
- Special Process Technology for high ESD Capability
- 100% Avalanche Test
- Good Stability and Uniformity with High E_{AS}

Applications

- Switched Mode Power Supplies
- Active Power Factor Correction, Electronic Ballasts

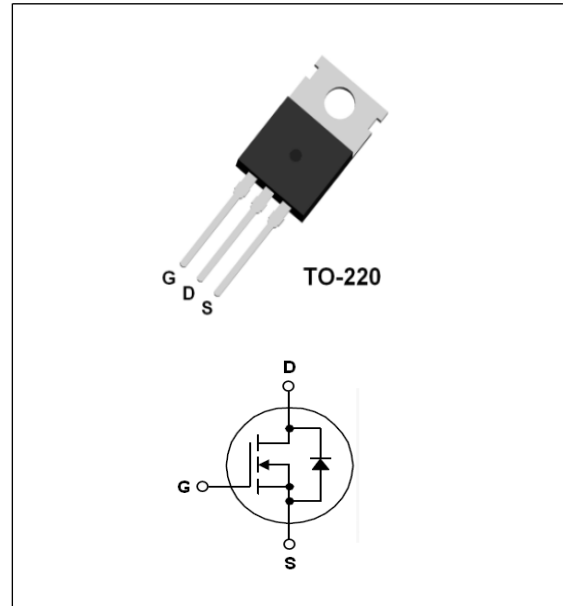

Absolute Maximum Ratings @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Ratings	Unit
V_{DSS}	Drain to Source Voltage	800	V
V_{GSS}	Gate to Source Voltage	± 30	V
I_D	Drain Current	$T_C=25^\circ\text{C}$	6
		$T_C=100^\circ\text{C}$	4
I_{DM}	Pulsed Drain Current (Note1)	24	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$	200
	Derate above 25°C		1.6
E_{AS}	Single Pulsed Avalanche Energy (Note 2)	820	mJ
T_J	Operating Junction Temperature Range	-55~+150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55~+150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.63	$^\circ\text{C}/\text{W}$
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	62	$^\circ\text{C}/\text{W}$

Electrical Characteristics @T_c=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain to Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	800	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	3.0	-	5.0	V
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} =10V, I _D =3A	-	1.3	1.8	Ω
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =V _{DSS} , V _{GS} =0V	-	-	10	uA
I _{GSS}	Gate to Source Leakage Current	V _{GS} =V _{GSS} , V _{DS} =0V	-	-	±100	nA

D-S Diode Characteristics and Maximum Rating @T_c=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Maximum Drain to Source Diode Forward Current		-	-	6.0	A
V _{SD}	Drain-Source Diode Forward Voltage	V _{GS} =0V, I _S =6A	-	-	0.9	V
T _{rr}	Reverse Recovery Time	V _{GS} =0V, I _S =6A,	-	350	-	ns
Q _{rr}	Reverse Recovery Charge	di/dt=-100A/us	-	3.6	-	nC

Switching Characteristics @T_c=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
t _{d(on)}	Turn-on Delay Time	I _D =6A, V _{DD} =400V, R _G =25Ω (Note 3)	-	40	-	ns
t _r	Rise Time		-	105	-	ns
t _{d(off)}	Turn-off Delay Time		-	55	-	ns
t _f	Fall Time		-	65	-	ns
C _{ies}	Input Capacitance	V _{GS} =0V, V _{DS} =25V, f=1.0MHz	-	1288	-	pF
C _{oes}	Output Capacitance		-	11	-	pF
C _{rss}	Reverse Transfer Capacitance		-	129	-	pF
Q _g	Total Gate Charge	I _D =6A, V _{DD} =640V V _{GS} =10V (Note 3)	-	39	-	nC
Q _{ge}	Gate to Source Charge		-	7.9	-	nC
Q _{gc}	Gate to Drain Charge		-	21	-	nC

Note:

1. Repetitive rating: pulse-width limited by maximum junction temperature
2. V_{DD}=100V, L=10mH, R_G=25Ω, V_G=10V, stating T_J=25°C
3. Essentially independent of operating temperature typical characteristics

Typical Performance Characteristics

Fig. 1. Typical on-Resistance Characteristics

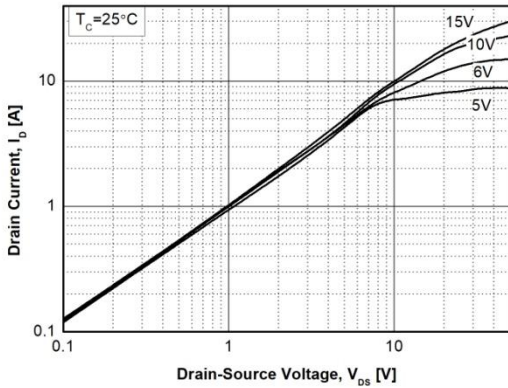


Fig. 2. Typical Transfer Characteristics

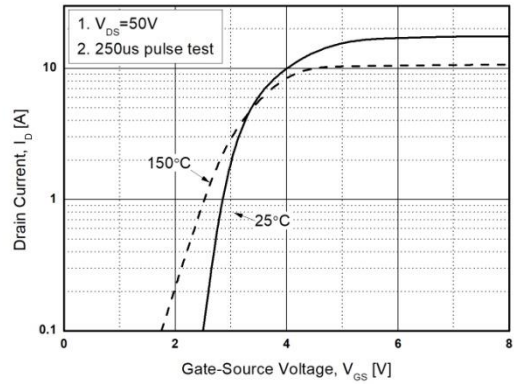


Fig. 3. Static on-Resistance vs. I_D

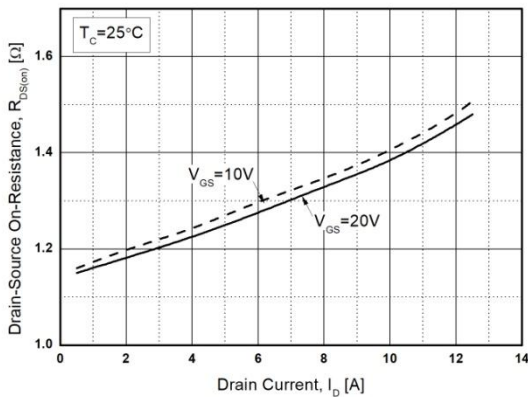


Fig. 4. Body Diode Forward Voltage vs. I_{DR}

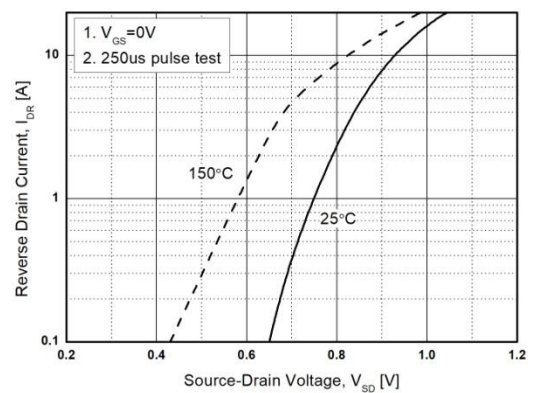


Fig. 5. Capacitance Characteristics


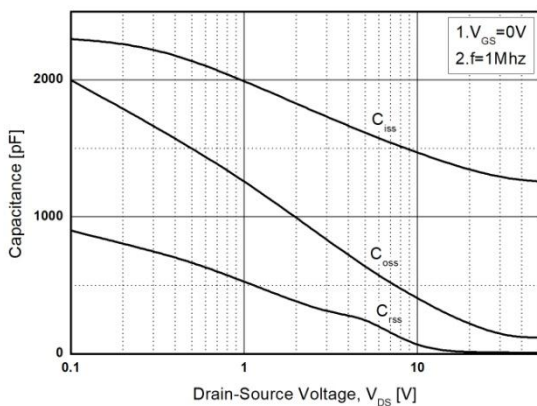


Fig. 6. Gate Charge Characteristics

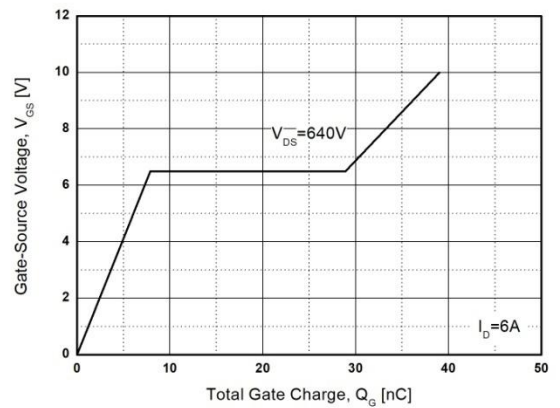

Typical Performance Characteristics

Fig. 7. Breakdown Voltage vs. Temperature

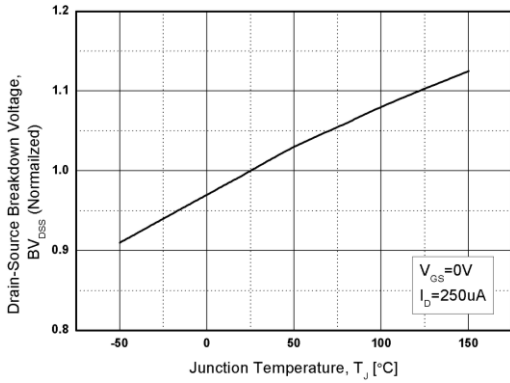


Fig. 8. Static on-Resistance vs. Temperature

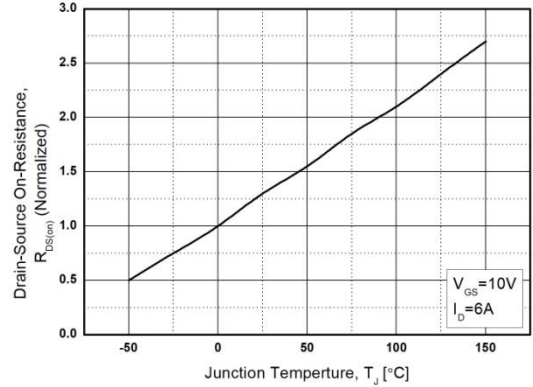


Fig. 9. Maximum Safe Operating Area

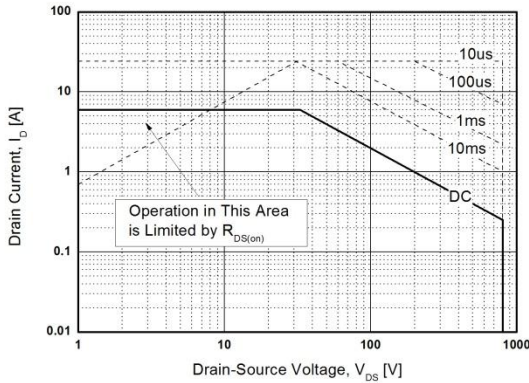


Fig. 10. Maximum Drain Current vs. Temperature

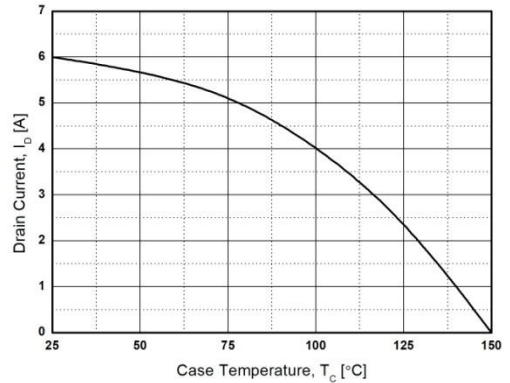


Fig. 11. Transient Thermal Response Curve

