

## 60A, 600V Hyperfast Single Diode

### Description


The AKFH60HP60S is an hyperfast single diode with low forward voltage drop. This device is designed for Inversion Welder and UPS. It is specially suited for use in Converter & Chopper and industrial applications as SMPS.

### Features

- Hyperfast Soft Recovery:  $t_{rr}=40\text{ns}$  (typ.)
- Typical Forward Voltage:  $V_F=1.75\text{V}$  @  $I_F=60\text{A}$
- Reverse Voltage:  $V_{RRM}=600\text{V}$
- Avalanche Energy Rated

### Applications

- Inversion Welder
- Converter & Chopper
- Rectifiers In Switch Mode Power Supplies

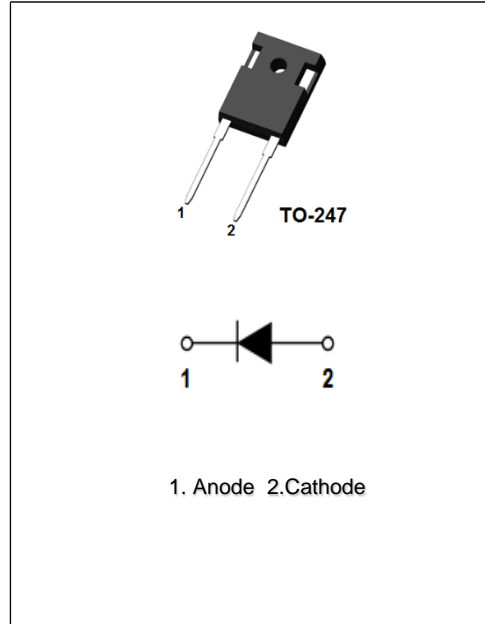

### Absolute Maximum Ratings

per diode at  $T_c=25\text{ }^\circ\text{C}$  unless otherwise noted

| Symbol      | Parameter                            | Ratings   | Unit             |
|-------------|--------------------------------------|---|------------------|
| $V_{RRM}$   | Peak Repetitive Reverse Voltage      | 600   | V                |
| $V_{RWM}$   | Working Peak Reverse Voltage         | 600   | V                |
| $V_R$       | DC Blocking Voltage                  | 600   | V                |
| $I_{F(AV)}$ | Average Rectified Forward Current    | per device at $T_c=120\text{ }^\circ\text{C}$<br>60 | A                |
| $I_{FSM}$   | Non-repetitive Peak Surge Current    | 600   | A                |
| $T_J$       | Operating Junction Temperature Range | -40~+150  | $^\circ\text{C}$ |
| $T_{STG}$   | Storage Temperature Range            | -40~+150  | $^\circ\text{C}$ |

### Thermal Characteristics

| Symbol        | Parameter                            | Ratings | Unit                      |
|---------------|--------------------------------------|---------|---------------------------|
| $R_{th(J-C)}$ | Thermal Resistance, Junction to case | 1.1     | $^\circ\text{C}/\text{W}$ |

**Electrical Characteristics** per diode @ $T_C=25^\circ\text{C}$  unless otherwise noted

| Symbol    | Parameter               | Conditions                                       | Min. | Typ. | Max. | Unit          |
|-----------|-------------------------|--|------|------|------|---------------|
| $V_F$     | Forward Voltage Drop    | $I_F=60\text{A}$                                 | -    | 1.75 | 1.85 | V             |
|           |                         | $I_F=60\text{A}, T_C=125^\circ\text{C}$          | -    | -    | 1.5  | V             |
| $I_R$     | Reverse Leakage Current | $V_R=600\text{V}$                                | -    | -    | 100  | $\mu\text{A}$ |
| $t_{rr}$  | Reverse Recovery Time   | $I_F=60\text{A}, di/dt=-200\text{A}/\mu\text{s}$ | -    | 40   | -    | ns            |
| $W_{AVL}$ | Avalanche Energy        | $L=30\text{mH}$                                  | 20   | -    | -    | mJ            |

**Typical Performance Characteristics**

Fig. 1. Typical Characteristics:  $V_F$  vs.  $I_F$

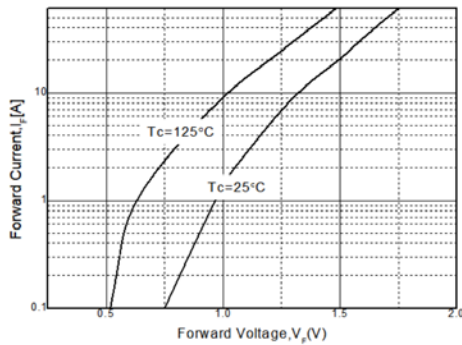


Fig. 2. Typical Characteristics:  $V_R$  vs.  $I_R$

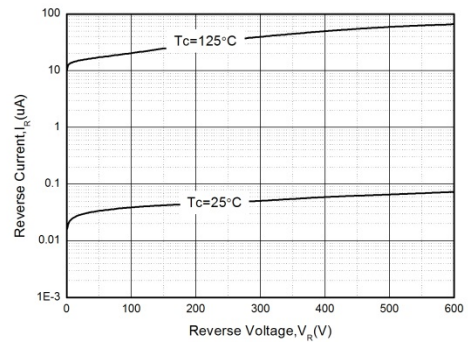


Fig. 3. Typical Reverse Recovery Time vs.  $di/dt$


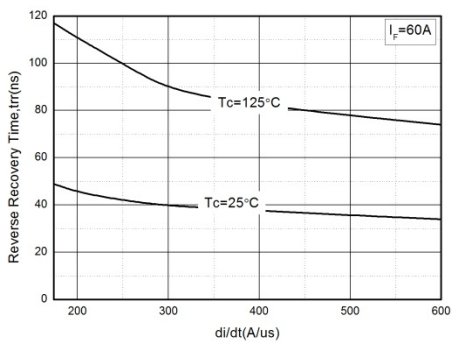


Fig. 4. Typical Reverse Recovery Current vs.  $di/dt$

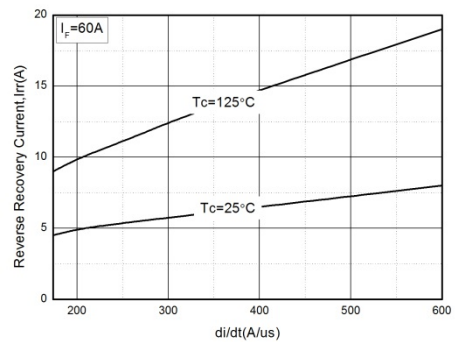

**Package Dimensions**

**TO-247**

(Dimensions in Millimeters)

