

## 1200V N-Channel SiC Power MOSFET

### Description

The AKM2CM009N120-C is a high blocking voltage N-Channel SiC power MOSFET. This device provide excellent performance for high voltage power supplies or pulse circuits.


These SiC MOS Module series are ideally suited for Solar and UPS Inverters, High Voltage DC/DC Converters, Motor Drivers, Switch Mode Power Supplies where switching losses are significant portion of the total losses.

### Features

- Typical on-Resistance:  $R_{DS(on)}=9m\Omega$  @  $V_G=18V$
- High Blocking Voltage
- High Speed Switching with Low Capacitance
- Good Stability and Uniformity with High  $E_{AS}$

### Applications

- Solar and UPS Inverters
- High Voltage DC/DC Converters
- Motor Drivers
- Switch Mode Power Supplies
- Battery Chargers

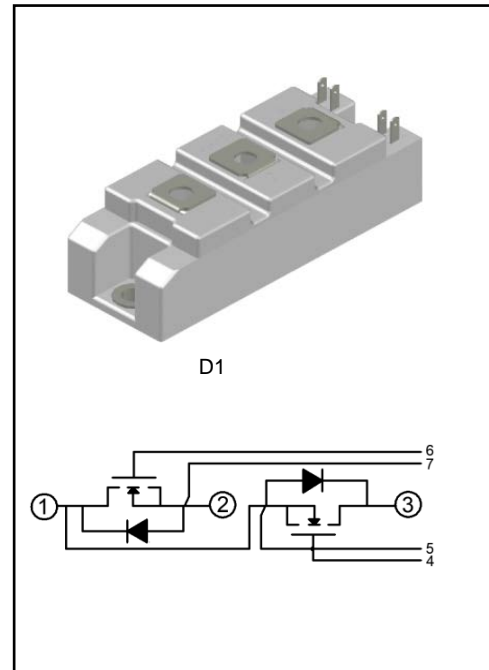

### Absolute Maximum Ratings @ $T_C=25^\circ C$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
$V_{DSS}$	Drain to Source Voltage		1200	V
$V_{GSS}$	Gate to Source Voltage		-8/+22	V
$V_{GSop}$	Recommended operation Values of Gate-Source Voltage		-4/+18	V
$I_D$	Drain Current	$V_{GS}=18V, T_C=25^\circ C$	210	A
		$V_{GS}=18V, T_C=100^\circ C$	140	A
$I_{DM}$	Pulsed Drain Current	(Note 1)	250	A
$P_D$	Maximum Power Dissipation	$T_C=25^\circ C$	530	W
$E_{AS}$	Single Pulsed Avalanche Energy	(Note 2)	1500	mJ
$T_J$	Operating Junction Temperature Range		-55~+175	$^\circ C$
$T_{STG}$	Storage Temperature Range		-55~+175	$^\circ C$

## Static Electrical Characteristics @T<sub>c</sub>=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =100uA	1200	-	-	V
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =23.5mA	2	2.6	4	V
R <sub>DS(on)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> =18V, I <sub>D</sub> =150A	-	9	11	mΩ
		V <sub>GS</sub> =18V, I <sub>D</sub> =150A T <sub>C</sub> =175 °C	-	14.2	-	
R <sub>G(int)</sub>	Internal Gate Resistance	f=1.0MHz	-	4.5	-	Ω
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =1200V, V <sub>GS</sub> =0V	-	1	100	uA
I <sub>GSS+</sub>	Gate to Source Leakage Current	V <sub>GS</sub> =22V, V <sub>DS</sub> =0V	-	10	250	nA
I <sub>GSS-</sub>	Gate to Source Leakage Current	V <sub>GS</sub> =-8V, V <sub>DS</sub> =0V	-	10	250	nA
g <sub>fs</sub>	Transconductance	V <sub>DS</sub> =20V, I <sub>D</sub> =150A	-	41.4	-	S
		V <sub>DS</sub> =20V, I <sub>D</sub> =150A, T <sub>C</sub> =175 °C	-	36.5	-	

## Switching Characteristics @T<sub>c</sub>=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
C <sub>iss</sub>	Input Capacitance	V <sub>GS</sub> =0V, V <sub>DS</sub> =1000V, f=1.0MHz	-	8400	-	pF
C <sub>oss</sub>	Output Capacitance		-	370	-	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		-	80	-	pF
Q <sub>g</sub>	Total Gate Charge	I <sub>D</sub> =60A, V <sub>DD</sub> =800V V <sub>GS</sub> =-4V/18V (Note 3)	-	480	-	nC
Q <sub>gs</sub>	Gate to Source Charge		-	110	-	nC
Q <sub>gd</sub>	Gate to Drain Charge		-	80	-	nC
t <sub>d(on)</sub>	Turn-on Delay Time	I <sub>D</sub> =150A , V <sub>DD</sub> =800V, R <sub>L</sub> =2.5Ω V <sub>GS</sub> = -4V/18V (Note 3)	-	16	-	ns
t <sub>r</sub>	Turn-on Rise Time		-	16.2	-	ns
t <sub>d(off)</sub>	Turn-off Delay Time		-	33	-	ns
t <sub>f</sub>	Turn-off Fall Time		-	8	-	ns

## Body Diode Characteristics @ $T_C=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_{SD}$	Drain-Source Diode Forward Voltage	$I_{SD}=80\text{A}$	-	1.45	1.55	V
		$I_{SD}=80\text{A}, T_C=175\text{ }^\circ\text{C}$	-	1.65	1.9	
$t_{rr}$	Reverse Recovery Time	$V_R=800\text{V}, I_{SD}=80\text{A}$ $di/dt=1000\text{A/us}$	-	65	-	ns
$Q_{rr}$	Reverse Recovery Charge		-	1260	-	nC
$I_{rrm}$	Peak Reverse Reverse Current		-	40	-	A

## Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C), MOSFET}$	Thermal Resistance, Junction to case, MOSFET	0.28	$^\circ\text{C/W}$
$R_{th(J-C), Diode}$	Thermal Resistance, Junction to case, Diode	0.43	$^\circ\text{C/W}$
$R_{th(C-S)}$	Thermal Resistance, Case to Sink	0.05	$^\circ\text{C/W}$

### Note:

1. Repetitive rating: pulse-width limited by maximum junction temperature
2.  $V_{DD}=50\text{V}, L=5\text{mH}, V_{clamp}=1200\text{V}, V_G=15\text{V}, I_D=25.0\text{A}$
3. Essentially independent of operating temperature typical characteristics

**Typical Performance Characteristics**

Fig. 1. Typical Output Characteristics @ 25°C

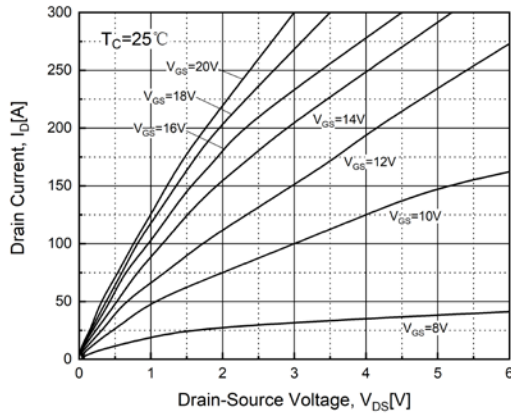


Fig. 2. Typical Output Characteristics @ 175°C

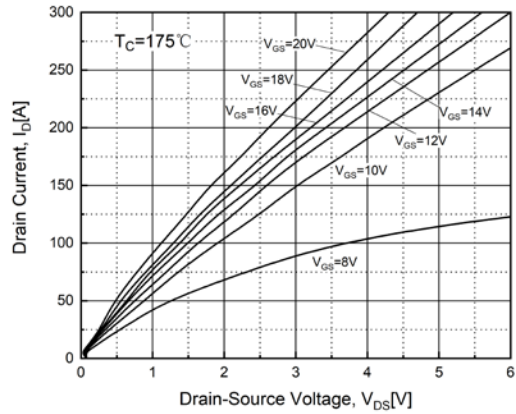


Fig. 3. Normalized On-Resistance vs. Junction Temperature

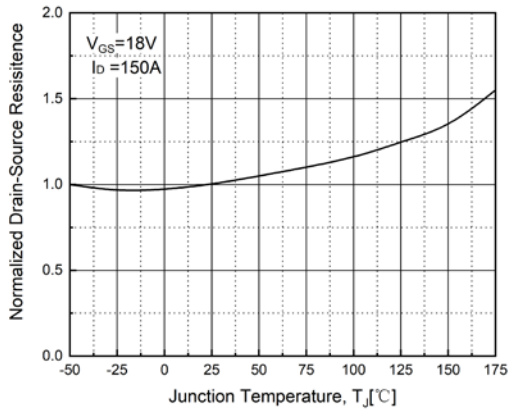


Fig. 4. On-Resistance vs. Drain Current for Various Temperatures

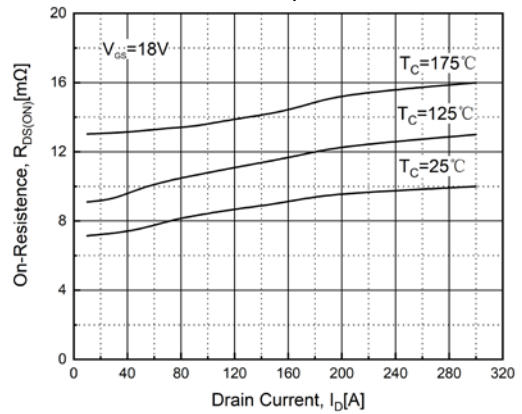


Fig. 5. On-Resistance vs. Drain Current for Various Gate Voltage


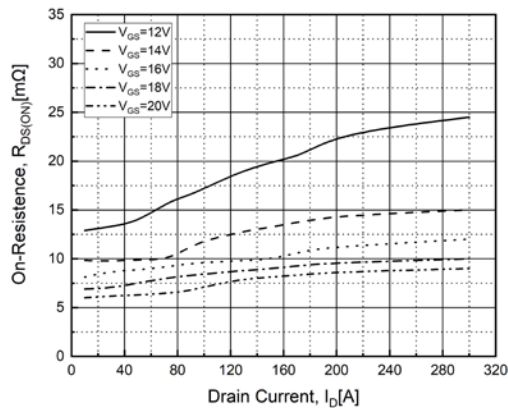


Fig. 6. On-Resistance vs. Gate Voltage for Various Temperatures

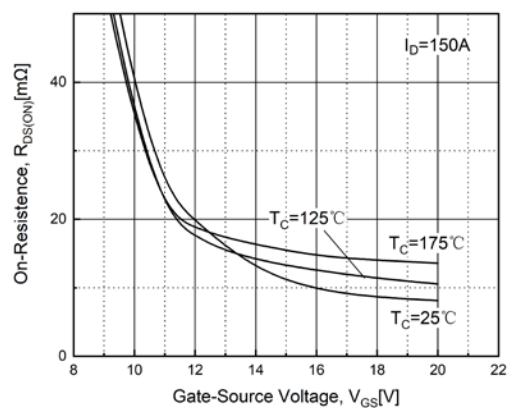

**Typical Performance Characteristics**

Fig. 7. Transfer Characteristics

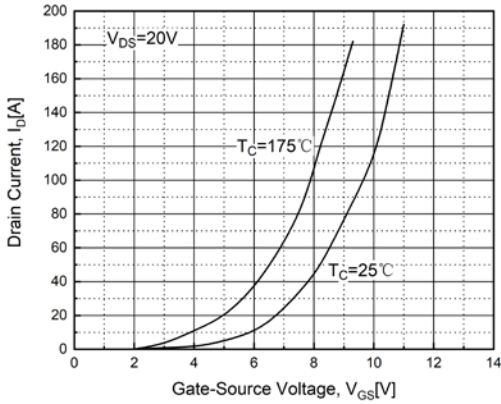


Fig. 8. Diode Forward Characteristics

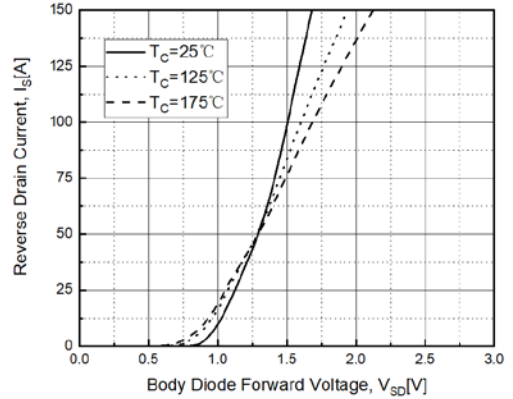


Fig. 9. Gate Charge Characteristics

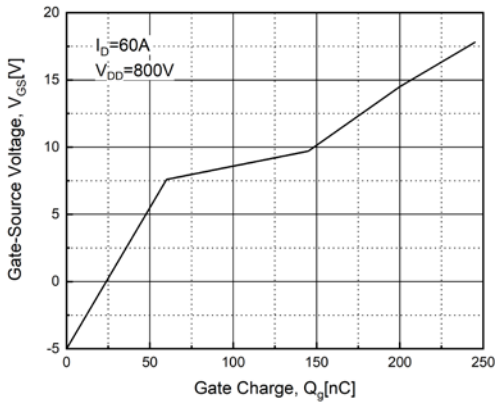


Fig. 10. Capacitance vs. Drain-to-Source Voltage

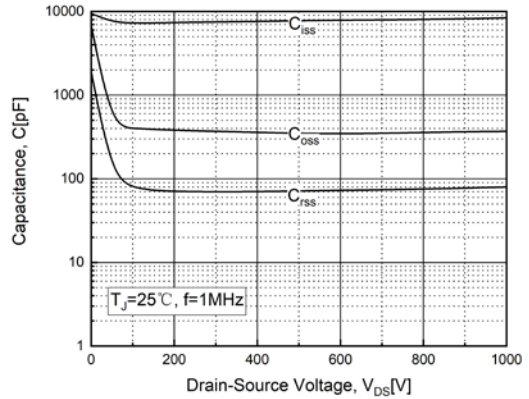


Fig. 11. Transient Thermal Impedance



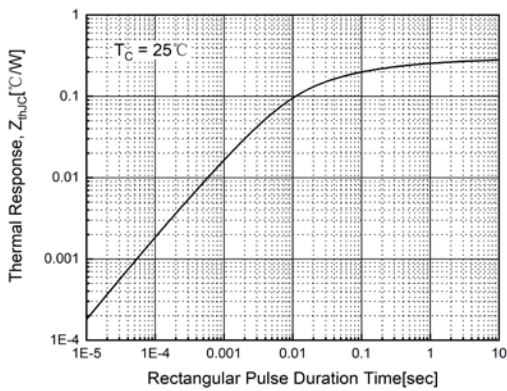


Fig. 12. Maximum Drain Current vs. Temperature

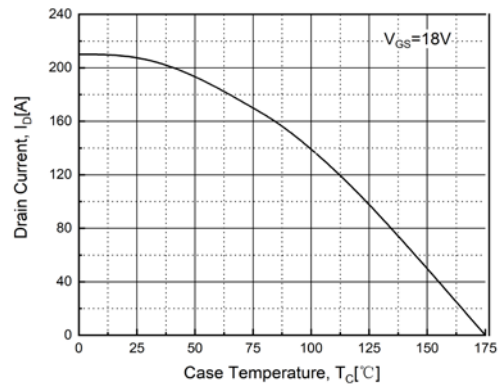

**Package Dimensions**

**D1**

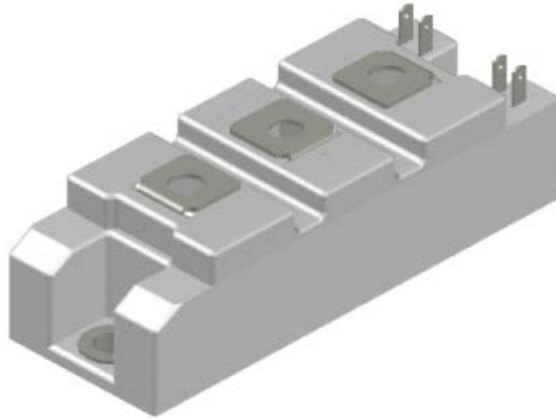

(Dimensions in Millimeters)

