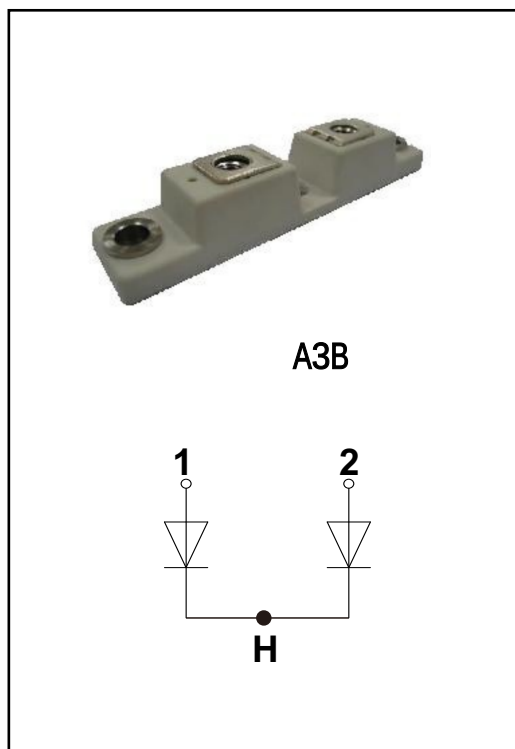


PRODUCT FEATURES

- Ultrafast Recovery Time
- Low Recovery Loss
- Low Forward Voltage
- Low Leakage Current
- Low Inductance Package

APPLICATIONS

- Inversion Welder
- Uninterruptible Power Supply
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- PFC



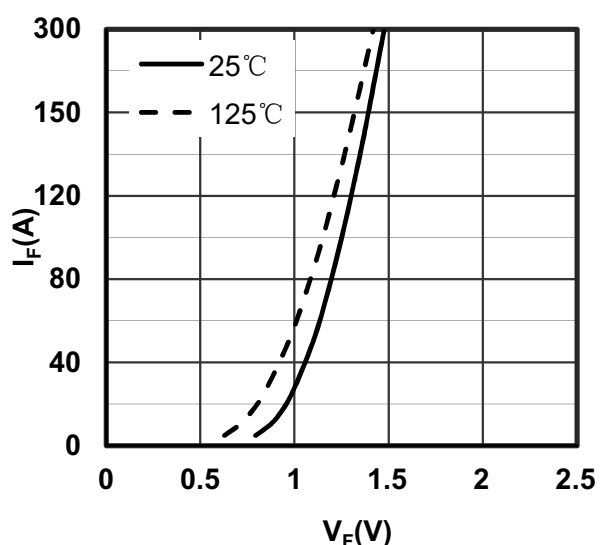
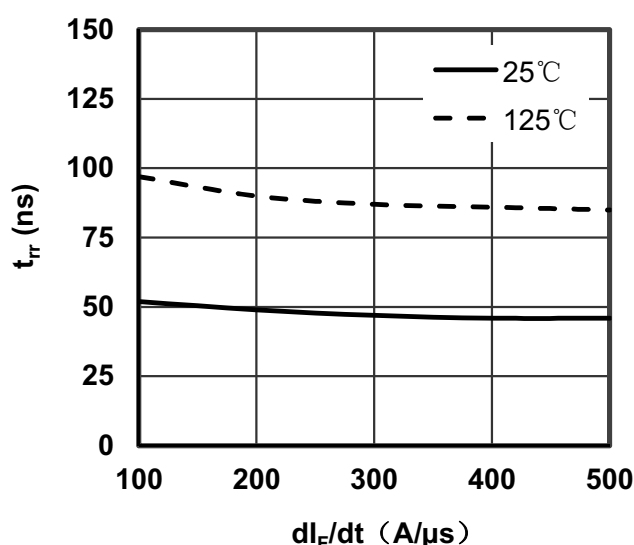
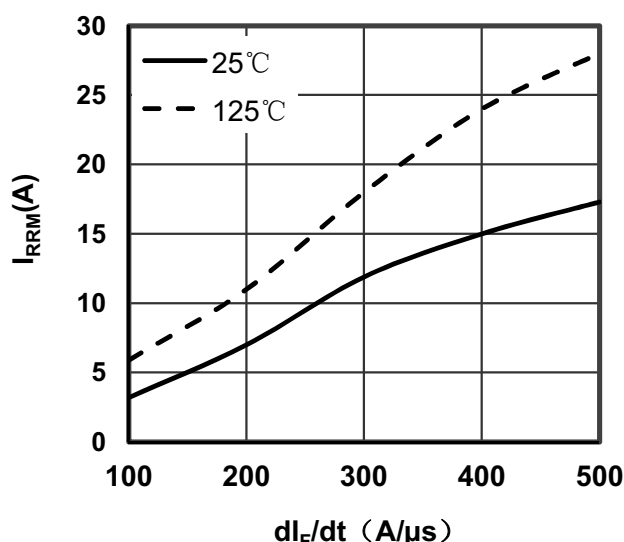
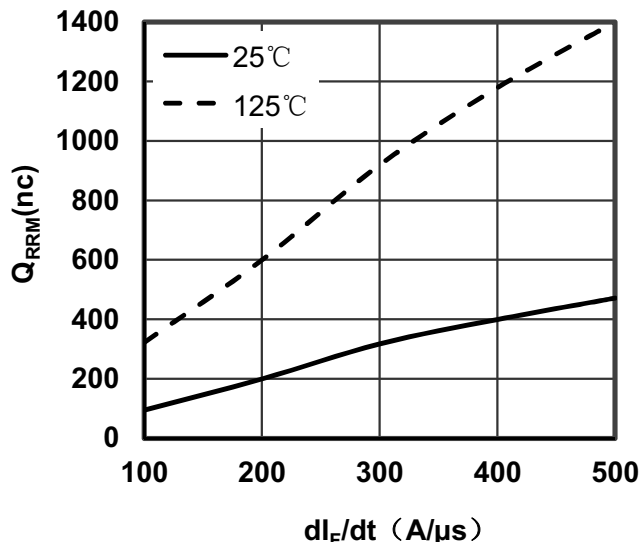
ABSOLUTE MAXIMUM RATINGS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
V_R	Maximum D.C. Reverse Voltage		400	V
V_{RRM}	Maximum Repetitive Reverse Voltage			
$I_{F(AV)}$	Average Forward Current	$T_C=90^{\circ}\text{C}$, Per Diode	150	A
		$T_C=90^{\circ}\text{C}$, Per Moudle	300	
$I_{F(RMS)}$	RMS Forward Current	$T_C=90^{\circ}\text{C}$, Per Diode	180	
I_{FSM}	Non Repetitive Surge Forward Current	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, Sine, peak value	1500	
		$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, Sine, peak value	1670	
I^2t	For Fusing	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, Sine, peak value	3675	A^2S
		$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, Sine, peak value	3600	
P_D	Power Dissipation		338	W
T_J	Junction Temperature		-40 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range		-40 to +125	$^{\circ}\text{C}$
Torque	Module to Sink	Recommended (M6)	3~4.7	Nm
Torque	Module Electrodes	Recommended (M6)	3~4.7	Nm
R_{thJC}	Junction to Case Thermal Resistance(Per Diode)		0.37	$^{\circ}\text{C}/\text{W}$
Weight			70	g

ELECTRICAL CHARACTERISTICS
 $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Reverse Leakage Current	$V_R=400\text{V}$	--	--	0.5	mA
		$V_R=400\text{V}, T_J=125^{\circ}\text{C}$	--	--	10	mA
V_F	Forward Voltage	$I_F=150\text{A}$	--	1.25	1.5	V
		$I_F=150\text{A}, T_J=125^{\circ}\text{C}$	--	1.15	--	V
t_{rr}	Reverse Recovery Time	$I_F=1\text{A}, V_R=30\text{V}, di_F/dt=-200\text{A}/\mu\text{s}$	--	38	--	ns
t_{rr}	Reverse Recovery Time	$V_R=200\text{V}, I_F=150\text{A}$	--	55	--	ns
I_{RRM}	Max. Reverse Recovery Current	$di_F/dt=-200\text{A}/\mu\text{s}, T_J=25^{\circ}\text{C}$	--	7	--	A
t_{rr}	Reverse Recovery Time	$V_R=200\text{V}, I_F=150\text{A}$	--	90	--	ns
I_{RRM}	Max. Reverse Recovery Current	$di_F/dt=-200\text{A}/\mu\text{s}, T_J=125^{\circ}\text{C}$	--	11	--	A


Figure 1. Forward Voltage Drop vs Forward Current

Figure 2. Reverse Recovery Time vs di_F/dt

Figure3. Reverse Recovery Current vs di_F/dt

Figure4. Reverse Recovery Charge vs di_F/dt

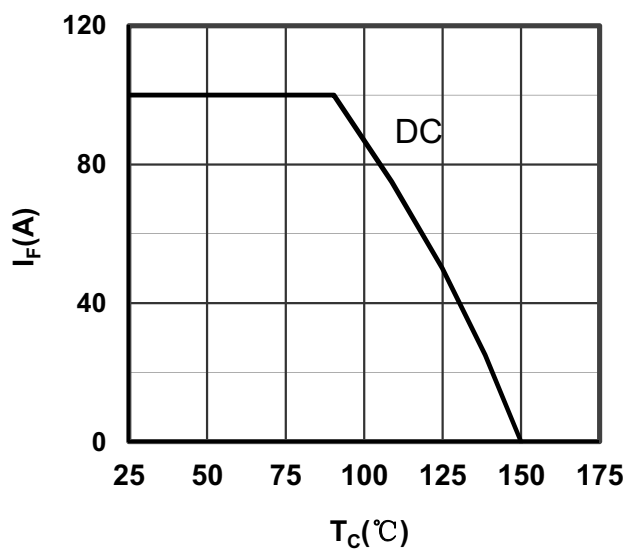


Figure 5. Forward current vs Case temperature

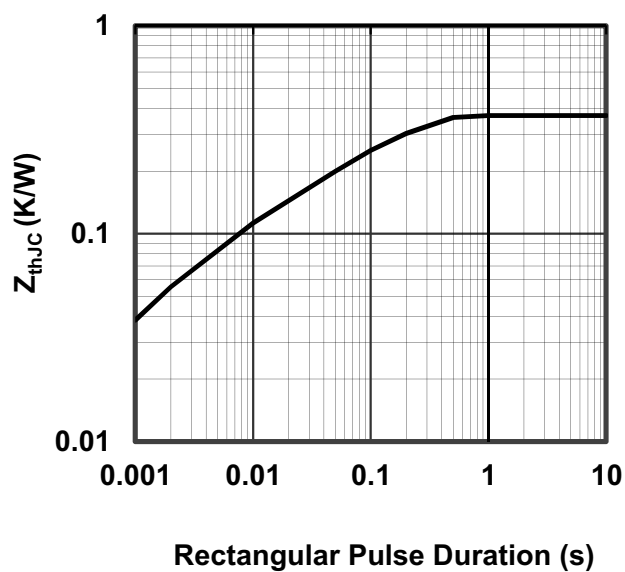
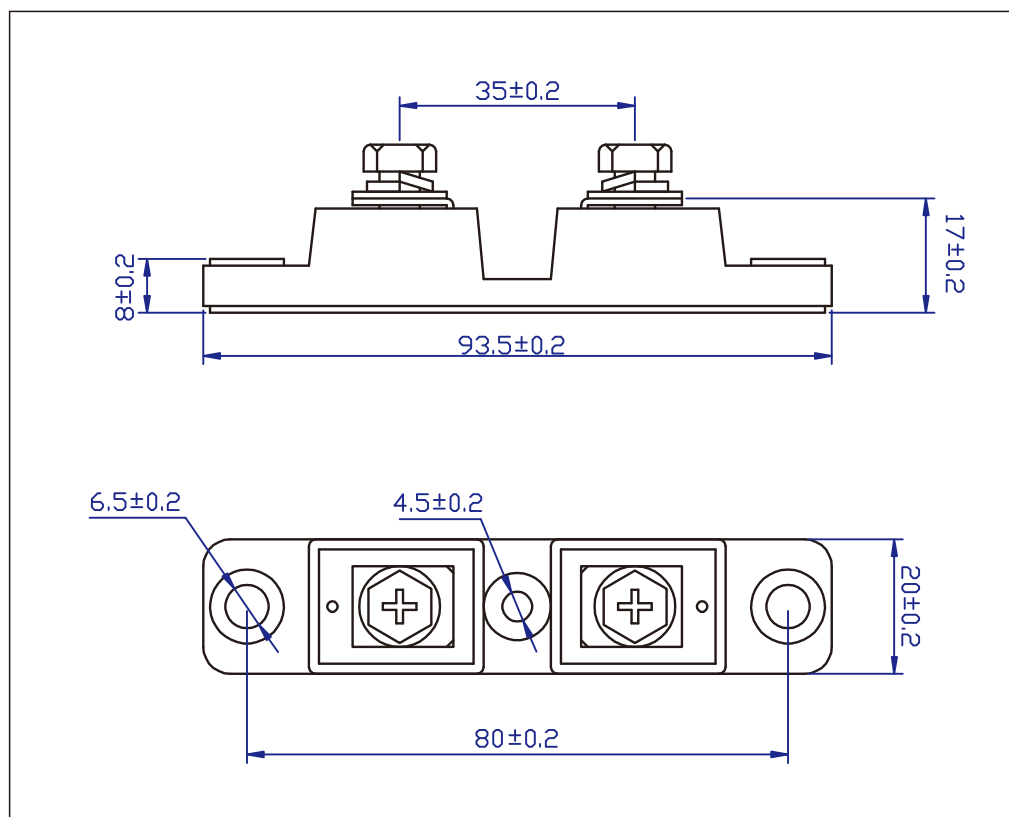


Figure 6. Transient Thermal Impedance

Package Outline



Dimensions (mm)